

FASTEST. SMARTEST. TOUGHEST.



PayCheck® 4
PRINTER

Finally, there's a printer that's as fast as the gaming action on your casino floor. Only the PayCheck 4™ Thermal Printer from JCM Global® can print a ticket in just 0.6 seconds! In fact, the PayCheck 4 is so lightning fast, there's no need to rely on a "burst," like some other, lesser printers do. Also, the PayCheck 4's 8mb of standard memory enables you to store more fonts, images, logos and barcodes, so you can personalize your players' gaming experience. And with a lifespan of approximately 640,000 slot-type tickets, its print head has the longest life of any in gaming. We call it fastest, smartest, toughest! You'll simply call it "awesome!"

FEATURES

- Fastest printer in gaming
- Longest print head life
- Most standard memory in gaming printers
- Standard casing footprint
- Unique illuminated anti-jamming bezel
- RoHS compliant
- Truly hot swappable
- Easy paper path access
- Rugged, intuitive design
- Diagnostic USB port

BENEFITS

- Greater customer satisfaction
- Better reliability and lower overall cost
- Lets you personalize with fonts, images and logos
- Fast plug-and-play replacement
- Reduces paper jams for more uptime
- Usable in all jurisdictions worldwide
- Easy replacement without powering down
- Makes maintenance fast & easy
- Gives easy access to all major components
- Allows for easy field service and upgrades

DIMENSIONS (HxWxD)

- 67x113x286mm (2.66x4.46x11.25")

WEIGHT

- 1.5kg (3.3 lbs)

PRINTING CHARACTERISTICS

- Print speed:
 - 250mm (9.8") per second in text mode (monochrome)
 - 125mm (5") per second in two-color mode
- 500 dots per line
- 203 dots per inch
- 62.5mm (2.46") print zone width (near-edge printing)
- 8 dots/mm horizontal and vertical

PAPER/MEDIA

- Type: top-coated thermal sensitive (qualified for Kanzaki TO381N, Appleton Royale, Nashua Corporation NT 10149)
- Ticket width x length
 - 65mm (2.56") x 156mm (6.12") - Slot ticket format
- Ticket thickness: 0.114-0.127mm (0.0045-0.005")
- Perf. strength: 1.59 +/- 0.27kg (3.5 +/- 0.6 lbs)
- Monochrome or three 2-color choices: red/black, blue/black, green/black

POWER REQUIREMENTS

- 24 VDC at 2.4A Maximum (excluding exit lamp)
- Exit lamp: 24 VDC
- 20mA required by lighted bezel
- Can sink up to 2A

RELIABILITY

- Printhead:
 - 100km or 100 million pulses for monochrome (approximately 640,000 slot-type tickets)
 - 50km or 50 million pulses for 2-color

COMMUNICATION INTERFACE OPTIONS


- Bidirectional R5-232 (up to 57.6 kbps)
- Dedicated USB Communication
- Dedicated USB Maintenance Port
- Netplex protocol
- GDS protocol
- Windows Driver

REGULATORY INFORMATION

- CSA ULc
- FCC Class B
- CE mark
- ICES

ENVIRONMENTAL

- Operating temperature: 0 to 50 °C (32 to 122 °F)
- Storage & shipping temperature: -20 to 60 °C (-4 to 140 °F)
- Operating humidity: 5 to 90% RH (non-condensing)

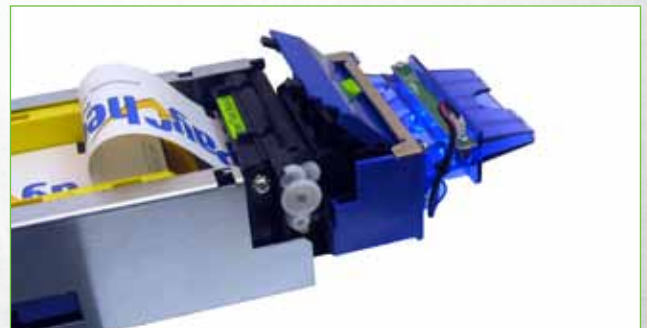

US: 702.651.0000 • US: 800.683.7248 • EU: 49.211.5306.4550 • JAPAN: 81.6.6703.8400

jcmglobal.com